


# Anchor Bar Layout For Four Anchors. Test Loads up to 6000kN.

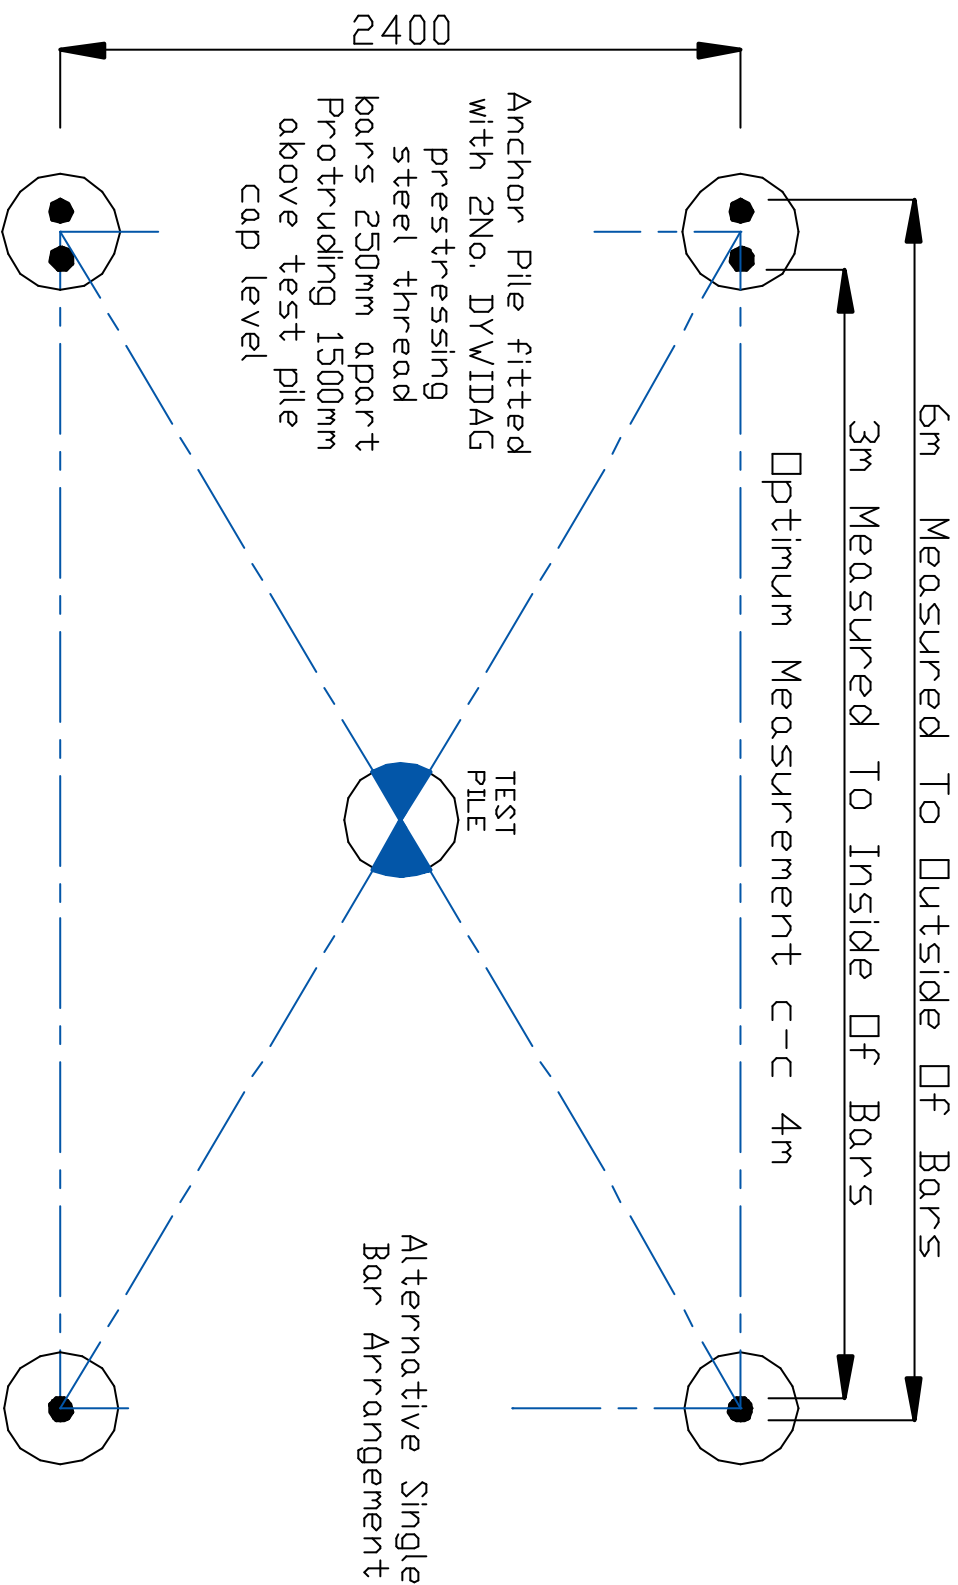


Note :- When constructing Anchor Piles, thread bars must not lie outside or inside the extreme measurements shown. It is important that the thread bars should lie in a line intersecting the test pile centre with a tolerance of +/-50mm. Design of thread bar is the contractor's responsibility. PMC is to be advised of type and number of bars installed. The test cap must be flat smooth and level, constructed to withstand applied forces.


MATERIAL:	FINISH:	DRAWN: SPT	DRG. NO. S600
DIMENSIONS IN mm UNLESS STATED		ORIGINAL SCALE	DATE: 16/3/04
TITLE			SHEET
P.M.C. LTD.			A3
System 600			

# Anchor Bar Layout For Four Anchors. Test Loads up to 6000kN.

Standard S600 Safe  
Working load 6000kN  
(Fos 1.5)

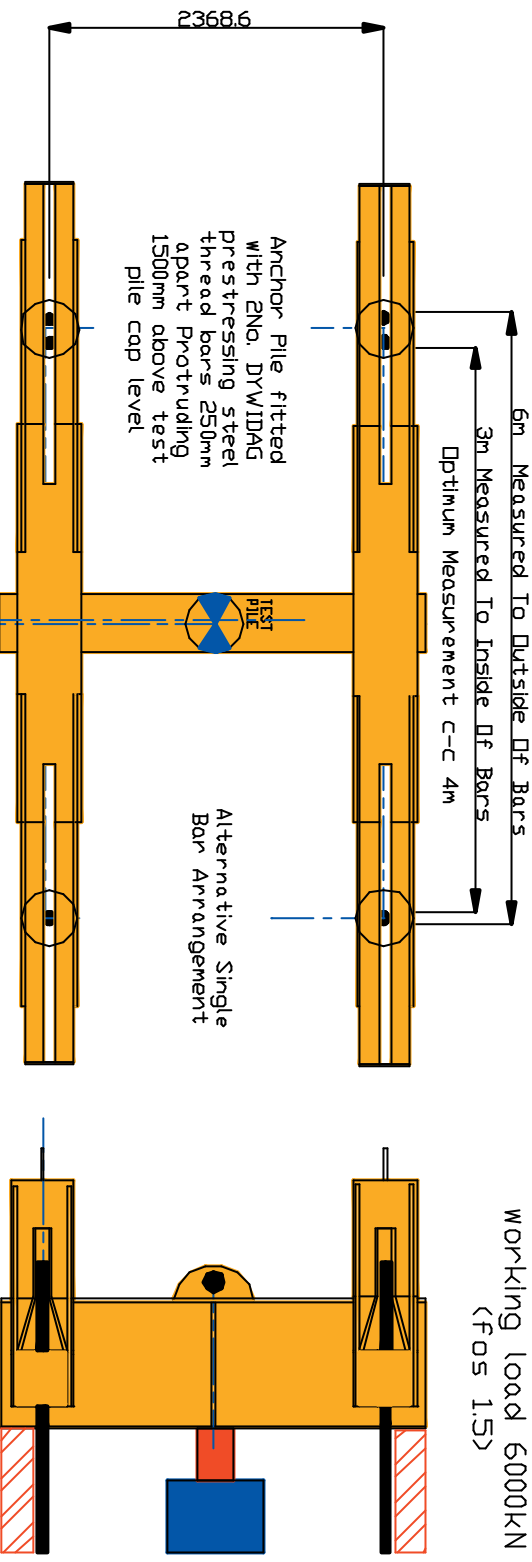

Note :- When constructing Anchor Piles, thread bars must not lie outside or inside the extreme measurements shown. It is important that the thread bars should lie in a line within a tolerance of +/-50mm. Design of thread bar is the contractor's responsibility. PMC is to be advised of type and number of bars installed. The test cap must be flat smooth and level, constructed to withstand applied forces.

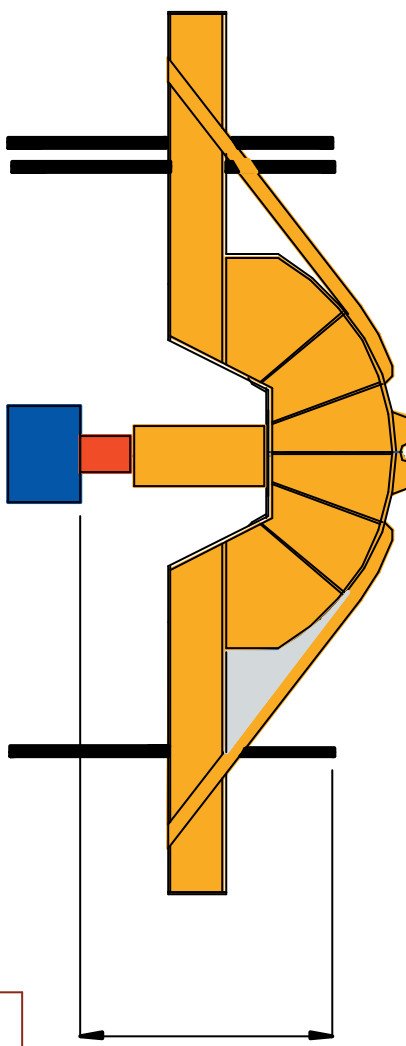

<b>P.A.C. LTD.</b>	
TITLE System 600	
DRG. NO.	S600

MATERIAL:	FINISH:	DRAWN: SPT	DATE: 20/7/04	SHEET	
DIMENSIONS IN mm UNLESS STATED		ORIGINAL SCALE	A3		